


WJRB-320A/B

柔性版印刷机

Flexo Graphic Printing Machine

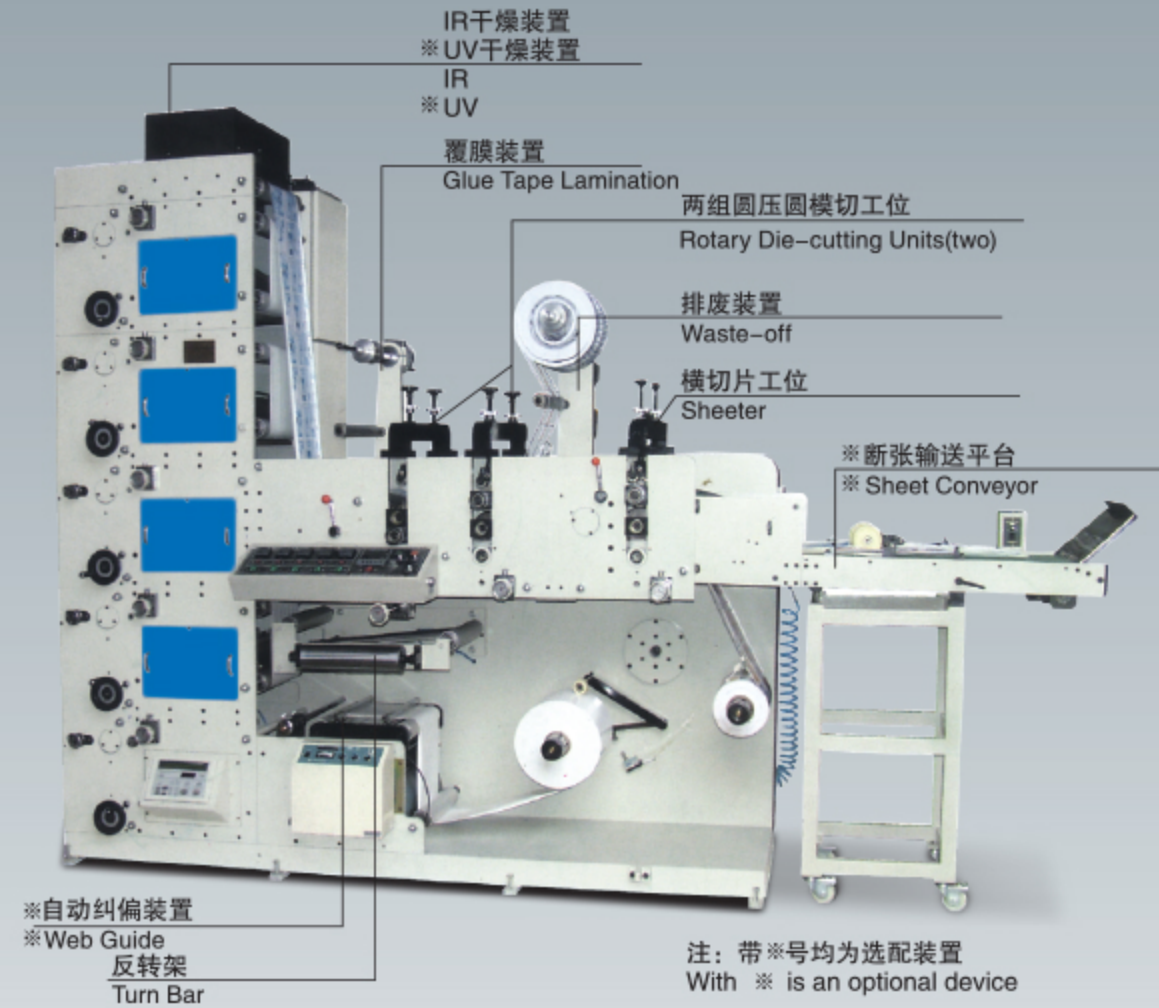

▲ WJRB-320B



▲ WJRB-320A

技术性能 Characteristics

- 主电机采用进口变频无极调速。
- 放料、收料采用磁粉制动器、离合器配合自动张力控制器控制材料张力,可确保印刷过程张力稳定、套印精准。
- 采用陶瓷网纹辊传墨,具有传墨稳定、无色差、寿命长、耐磨、耐腐蚀的特点,可大大提高印刷品质及印刷效率。
- 印刷单元采用360度周向对版调节及横向拉版调节,大大缩短了印刷准备时间,减少了材料浪费。
- 各印刷单元均配有一组红外线烘干装置,每一色印刷后可立即干燥。
- 停车时墨辊可自动脱离,并低速度旋转,以防水墨干结损坏网纹辊。
- 从卷筒材料供纸、印刷、上光、烘干、覆膜、模切、排废、收卷一次完成。本机具有适应范围广、油墨无污染、经济效益高、印刷速度快等特点,是印刷长版票据、卡纸、高档不干胶商标的理想机器。
- 本机还可选配UV干燥装置、自动纠偏装置、电晕处理装置等。

- The main motor adopts imported converter to adjust the speed in a stepless way.
- Unwinding and rewinding are controlled through magnetic powder brake and clutch. It uses Japanese Mitsubishi tension controller to control the tension of the machine to ensure stable tension and precise overlapping.
- The machine is equipped with ceramic rollers for inking with the features of stable inking, no color difference, long life span, wear and tear endurance, anti corrosion which will also increase the print quality and efficiency.
- The printing unit can register in 360 degrees at longitudinal direction and do lateral adjustment as well which greatly shorten the preparing time and reduces the material waste.
- Each printing unit is equipped with one infrared drier to dry the print right after it is printed.
- The inking roller can automatically fall off at stoppage and run at low speed in order to keep the ink from being dry and solid.
- Unwinding, printing, vanishing, drying, laminating and rewinding of roll material can be done in one process. It is characterized by wide application, no ink population, fast dry and quick print. It is an ideal printing machine for the commercial bill, board and high-grade adhesive label.
- It is also optional for the machine to be equipped with UV unit, web-guide and corona Unit.

技术参数 Technical Variables

机型	Model	320A	320B
印刷速度	Printing speed	15-60m/min	15-60m/min
可印色数	Printing color	4-6色(color)	4-6色(color)
模切工位	Die-cutting station	1组 (unit)	3组 (units)
卷筒纸最大宽度	Max. web width	320mm	320mm
印刷最大宽度	Max. printing width	310mm	310mm
放卷最大直径	Max.unwinding diameter	600mm	600mm
收卷最大直径	Max.rewinding diameter	550mm	550mm
印刷周长	Printing Length	178-340mm	178-340mm
套准精度	Precision of overprint	±0.1mm	±0.1mm
外形尺寸	Overall dimensions(LxWxH)	2×1.1×2.1m	2.6×1.1×2.1m
机器重量	Machine weight	约(About)2200kg	约(About)2600kg